

**BELL SYSTEM PRACTICES**  
**Teletypewriter and Data Stations**

**SECTION P34.505**  
**Issue 1, June, 1961**  
**AT&TCo Standard**

## **28 ELECTRICAL SERVICE UNIT**

### **LUBRICATION**


#### **1. GENERAL**

1.01 This section provides the lubrication information for the maintenance of 28 electrical service units. This information, together with that contained in the section entitled Teletypewriter Apparatus, Lubrication, General Information and Routines, gives the complete information for lubricating the unit.

1.02 Any mechanism on an electrical service unit which requires lubrication should be lubricated before being placed in service as specified in the section entitled Preparation of Teletypewriter Apparatus for Installation. After a few weeks in service, it should ordinarily be relubricated to make certain that it has been lubricated properly. Thereafter, because of the varying conditions at each station, the mechanism should be lubricated as often as specified by local instructions.

## 2. LUBRICATION DETAILS

### 2.01 Stop Magnet

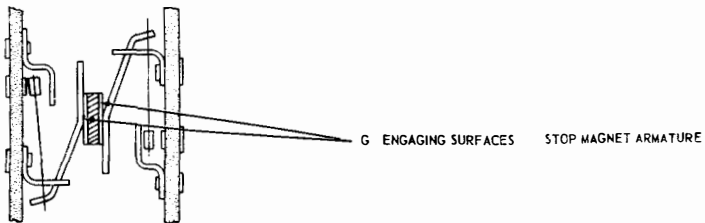

### 3. ASSOCIATED BELL SYSTEM PRACTICES

3.01 The following Bell System Practices provide additional information that may be required in connection with this section.

<u>Subject</u>	<u>Section</u>
Teletypewriter Apparatus, Lubrication, General Information and Routines .....	P30.011
Teletypewriter Apparatus, General Requirements and Procedures .....	P30.012
Teletypewriter Apparatus, Disassembly and Reassembly, General Information and Routines	P30.013
Teletypewriter Tools and Maintenance Supplies..	P30.301
Teletypewriter Apparatus, Preparation of Apparatus for Installation .....	P33.014
Alphabetical Index of 28-type Equipment, Bell System Practices, and Associated 28 ASR Station Drawings .....	P34.001

