

January 1, 1982

AP200
high speed matrix printer
features and prices

FEATURES

General

Print Speed:	340 cps, bi-directional, logic seeking
Throughput:	125 lpm at 132 character per line 200 lpm at 72 characters per line 300 lpm at 40 characters per line
Paper Slew Speed:	10 inches per second
Character Set:	Up-low ASCII or EBCDIC (selectable); true lower case characters (without descenders)
Character Font:	7 x 7 half-space matrix (operator replaceable)
Number of Columns:	132 maximum
Line Spacing:	6 or 8 lines per inch, selectable
Character Spacing:	Standard — 10 cpi (operator selectable) Condensed — 16.7 cpi (operator or on-line selectable) Expanded — 5 cpi (on-line selectable)
Interface:	Teletype Standard Serial Interface (SSI) or Simplified EIA, selectable
Buffer:	SSI: Two 132-character lines Simplified EIA: 1,000 characters
Parity:	Even, odd, none or 8th bit marking
Escape Sequences:	Printed or ignored, selectable
Underline Character:	6 lpi printing only
Alarm Sensing:	Paper out, cover open, and paper loading
Compatibility:	Model 40/4, 4420 and 4540

Forms Processing

Type of Form:	Continuous fan-fold, edge-perforated 3" to 16"
Forms Handling:	Variable width tractor
Number of Copies:	Original plus 5
Loading:	Front and bottom

Operator Controls and Indicators

- 6/8 lpi switch
- Self-test switch and status indicator
- 10/16 pitch switch
- On-line switch and indicator
- Paper step (advance) switch
- Forms length selection switch
- Printer status indicator
- Alarm/clear switch and indicator
- Top of form switch
- Forms alignment scale
- Forms thickness control
- Soft roll control
- Backspace function


FEATURES (Cont'd)

Electrical Requirements

Input Power: 250 watts, operating
150 watts, standby
Voltage: 115V, 60 Hz or
110-220V, 50/60 Hz

Weight & Dimensions (Approx.):

Height: 8.3 inches
Width: 26.4 inches
Depth: 23.4 inches
Weight: 72 lbs.

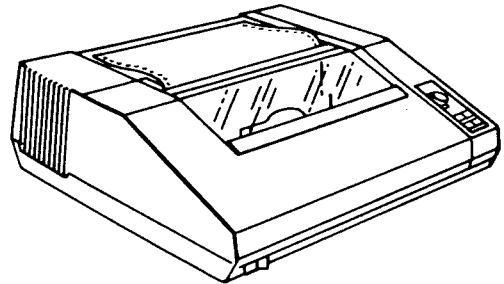

SELECTION GUIDE & PRICES

AP200 Printer

115V 60 Hz	110-220V 50/60 Hz	Catalog Number	List Price
●		45AP201AAA	\$3868.00
	●	45AP202AAA	4038.00

ACCESSORIES

Pedestal 45CAB403AAA \$255.00
EIA adaptor cable 454702 \$ 39.60
Ribbon cartridge 454700 \$ 9.45

Specifications and prices are subject to change without notice.

TELETYPE CORPORATION

GENERAL OFFICES: 5555 Touhy Avenue, Skokie, Illinois 60077 Telephone: (312) 982-2000—TWX: 910-223-3611
and TELEX: 25-4051 (both have 24 hour automatic answering service)

SD 200P-501